



Zatt
carpet

shaw contract®
commercial flooring





Front cover shows
ROAM TILE 5T228
in stonegate 26760,
shadow 26557
and grey mist 26481

With Rapid Select, from Shaw Contract, you have a choice of specially edited, influential styles and colours that meet the demand of modern, functional, commercial interiors.

The ideal flooring choice for quick turnaround projects without compromising on quality, performance or design.


Rapid Select, de Shaw Contract, propose un choix de styles et couleurs tendances spécialement développés pour satisfaire les demandes d'intérieurs modernes, fonctionnels et professionnels.

C'est le choix de revêtement de sol idéal, pour réaliser des projets rapidement, sans faire aucune concession sur la qualité, la performance ou le design.

Rapid Select, de Shaw Contract, propone una elección de estilos y colores de tendencia especialmente desarrollados para satisfacer la demanda de interiores modernos, funcionales y comerciales

Es la elección de revestimiento ideal para realizar proyectos rápidamente, sin hacer ninguna concesión sobre la calidad, el funcionamiento o el diseño

GRAPH TILE 5T227
in grey mist 26481
and regent blue 26485





stonegate 26760



grey mist 26481



flint 26505



shadow 26557



sussex grey 26535



cobblestone 26515

Roam offers soft organic movement that mimics a natural texture often found in nature. The elongated plank tile format allows designers the flexibility to create unique floor layouts.

Roam présente un léger mouvement organique imitant une texture souvent retrouvée en pleine nature. Le format allongé des dalles plank offre aux designers une grande flexibilité pour créer des agencements de sols uniques

Roam presenta un movimiento suave orgánico qui imita una textura natural encontrada a menudo, en la naturaleza. El formato alargado de los plank permite a los diseñadores la flexibilidad para crear diseños de suelos únicos





grey mist 26481



regent blue 26485




cobblestone 26515



stonegate 26760



looking glass 26530

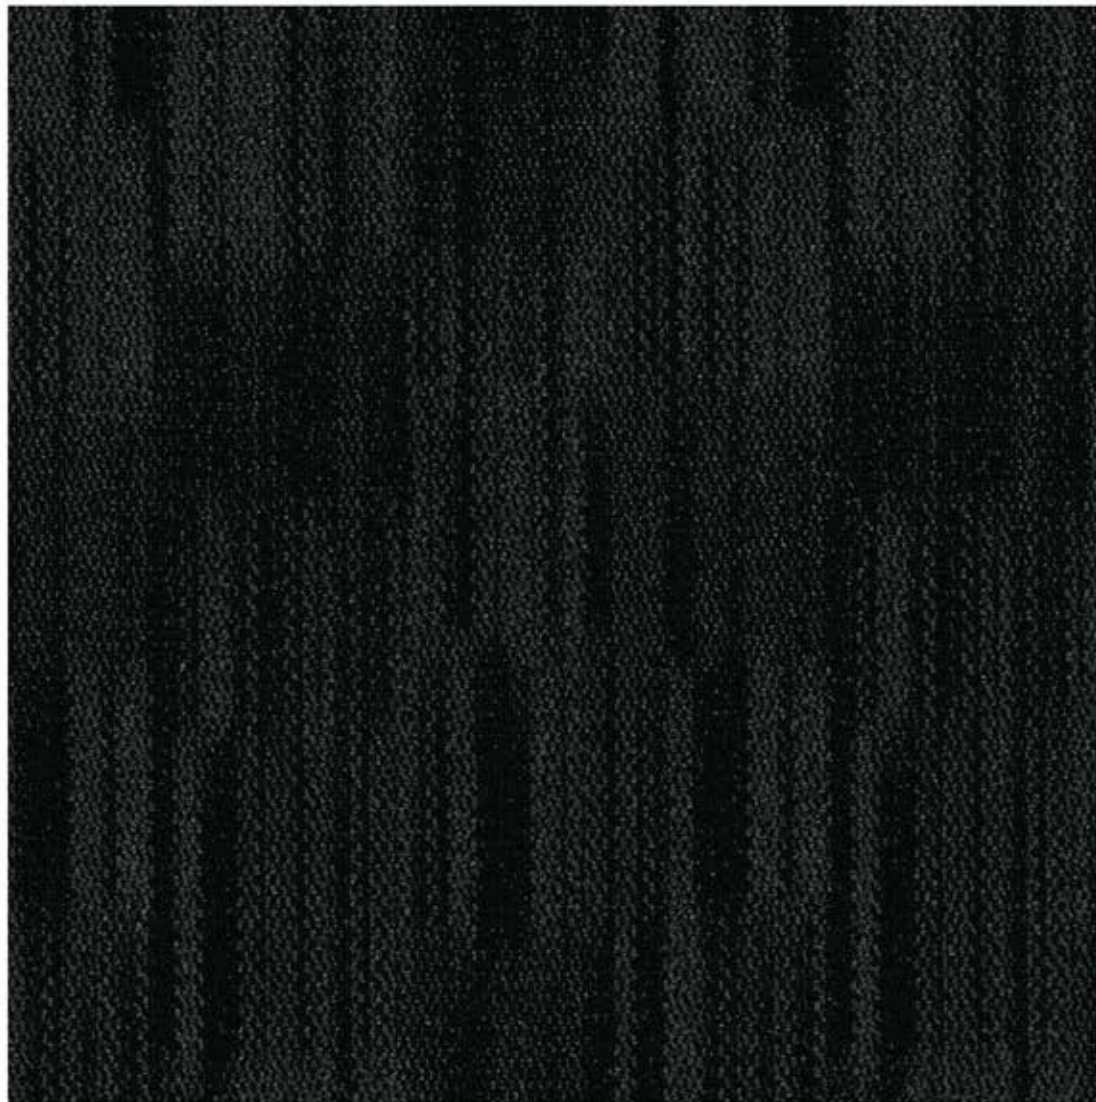

flint 26505



sussex grey 26535



shadow 26557

Nook is an eye-catching off-set square design, with high and low textured pattern effects. Providing designers with an option to create both interest and a flooring feature.

Nook attire tous les regards par ses motifs géométriques carrés, décalés et ses effets texturés. Elle fournit aux designers la possibilité, à la fois, de proposer un revêtement de sol à part entière et de créer l'enthousiasme autour d'elle.

Nook llama la atención por sus diseños geométricos cuadrados y desplazados con efectos de textura. Nook ofrece a los diseñadores la oportunidad de proponer un revestimiento único y además, de crear entusiasmo



GRAPH TILE 5T227



shadow 26557



stonegate 26760



cobblestone 26515



sussex grey 26535



regent blue 26485



looking glass 26530




flint 26505

Graph features a network of lines that overall create a small scale pattern, and takes its inspiration from the linear patterning of graph paper.

Graph représente un enchevêtrement de lignes qui crée un motif rappelant de petites échelles. Elle prend son inspiration dans la structure linéaire du papier millimétré.

Graph representa una maraña de líneas. Esto crea un modelo que recuerda pequeñas escalas, y que se inspira en la estructura lineal del papel de gráfico.

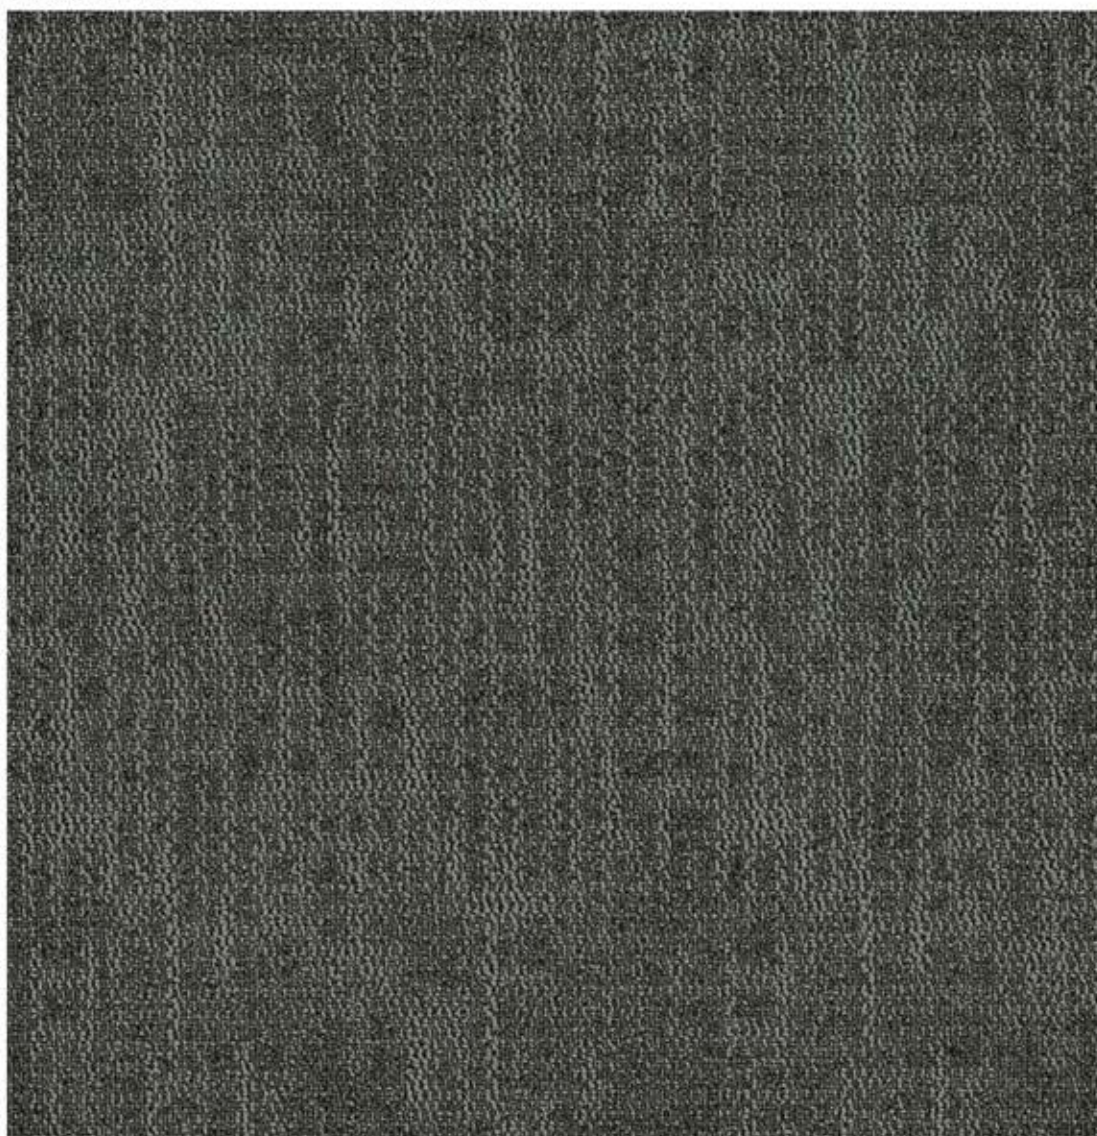

grey mist 26481

roam tile

style number:	5T228
collection:	rapid select
product type:	carpet tile


construction	standard	data + performance
type of manufacture:	ISO 2424	tufted 1/12" 47.24 per 10 cm
aspect:	ISO 2424	multi-level pattern loop
dye method:		100% solution dyed
dimensions:	EN 994	25 x 100 cm 20 tiles (5 m²) per box
primary backing:	ISO 2424	PET non-woven
secondary backing:	ISO 2424	taskworx® polymer modified bitumen
pile fibre composition:	ISO 2424	eco solution Q® polyamide 6
total thickness:	ISO 1765	6.0 mm
effective pile thickness:	ISO 1766	2.2 mm
total mass:	ISO 8543	4,131 g/m²
nominal total pile mass:	ISO 2424	616 g/m²
effective pile mass:	ISO 8543	261 g/m²
pile density:	ISO 8543	0.108 g/cm³

performance

number of tufts:	ISO 1763	229,000/m² 45.9 per 10cm
electrostatic propensity:	ISO 6356	≤ 2.0 kv (stroll test)
use classification:	EN 1307	33 commercial heavy
luxury class:	EN 1307	LC 1
dimensional stability:	EN 986	≤ 0.2 %
impact sound insulation:	ISO 10140	25 dB
sound absorption classification:	ISO 354/11654	0.15aw Class E
thermal resistance m² K/W:	ISO 8302	0.065 m² K/W TOG 0.65
dry slip resistance:	ISO 13893	pass
colour fastness to light:	ISO 105-B02	> 6
flammability:	EN 13501-1	Bfl - S1
castor chair:	EN 948	≥ 2.4 continuous use

10 year commercial limited warranty subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

recommended installation methods



coordinating products

carpet tile: **nook tile, graph tile**



attributes + certifications

environmental product declaration (EPD):

take back policy:*

product packaging:

country of origin:**

3rd party certified in accordance with ISO 14044, ISO 14025, EN 15804

shaw contract offers a take back policy for all taskworx products

100% recyclable

United Kingdom

additional information

*For more information about the take back policy, visit www.shawcontract.com/takebackpolicy.

**Meets or exceeds all local and national regulations in country of manufacture. (Manufactured in an ISO 90001 & ISO 14001 certified facility or equivalent)



07

EN 14041:2004/AC 2006

DOP 0338/CPR/0517/0917/BT

Manufactured by: Shaw Industries Group Inc.,
PO Drawer 2128, Dalton, Georgia 30722 USA



Taskworx® carpet tiles for use as an indoor floor
covering as specified by the manufacturer
Notified Body Number 0338

EPD®



nook tile

style number:	5T229
collection:	rapid select
product type:	carpet tile


construction	standard	data + performance
type of manufacture:	ISO 2424	tufted 1/12" 47.24 per 10 cm
aspect:	ISO 2424	multi-level pattern loop
dye method:		100% solution dyed
dimensions:	EN 994	50 x 50 cm 20 tiles (5 m²) per box
primary backing:	ISO 2424	PET non-woven
secondary backing:	ISO 2424	taskworx® polymer modified bitumen
pile fibre composition:	ISO 2424	eco solution Q® polyamide 6
total thickness:	ISO 1765	6.2 mm
effective pile thickness:	ISO 1766	2.4 mm
total mass:	ISO 8543	4,121 g/m²
nominal total pile mass:	ISO 2424	616 g/m²
effective pile mass:	ISO 8543	264 g/m²
pile density:	ISO 8543	0.084 g/cm³

performance

number of tufts:	ISO 1763	212,000/m² 45.9 per 10cm
electrostatic propensity:	ISO 6356	≤ 2.0 kv (stroll test)
use classification:	EN 1307	33 commercial heavy
luxury class:	EN 1307	LC 1
dimensional stability:	EN 986	≤ 0.2 %
impact sound insulation:	ISO 10140	25 dB
sound absorption classification:	ISO 354/11654	0.15aw Class E
thermal resistance m² K/W:	ISO 8302	0.075 m² K/W TOG 0.75
dry slip resistance:	ISO 13893	pass
colour fastness to light:	ISO 105-B02	> 6
flammability:	EN 13501-1	Bfl - S1
castor chair:	EN 948	≥ 2.4 continuous use

10 year commercial limited warranty subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

recommended installation methods



coordinating products

carpet tile: **graph tile, roam tile**



attributes + certifications

environmental product declaration (EPD):
take back policy:*
product packaging:
country of origin:**

3rd party certified in accordance with ISO 14044, ISO 14025, EN 15804
shaw contract offers a take back policy for all taskworx products
100% recyclable
United Kingdom

additional information

*For more information about the take back policy, visit www.shawcontract.com/takebackpolicy.

**Meets or exceeds all local and national regulations in country of manufacture. (Manufactured in an ISO 90001 & ISO 14001 certified facility or equivalent)



07

EN 14041:2004/AC 2006

DOP 0338/CPR/0517/0917/BT

Manufactured by: Shaw Industries Group Inc.,
PO Drawer 2128, Dalton, Georgia 30722 USA



Taskworx® carpet tiles for use as an indoor floor
covering as specified by the manufacturer
Notified Body Number 0338

EPD®



Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. This carpet is an exclusive design and may not be duplicated in any manner. Use of this design in the creation of another carpet design is also strictly prohibited. Visit shawcontract.com/testing for more information.

graph tile


style number:	5T227
collection:	rapid select
product type:	carpet tile

construction	standard	data + performance
type of manufacture:	ISO 2424	tufted 1/12" 47.24 per 10 cm
aspect:	ISO 2424	multi-level pattern loop
dye method:		100% solution dyed
dimensions:	EN 994	50 x 50 cm 20 tiles (5 m²) per box
primary backing:	ISO 2424	PET non-woven
secondary backing:	ISO 2424	taskworx® polymer modified bitumen
pile fibre composition:	ISO 2424	eco solution Q® polyamide 6
total thickness:	ISO 1765	5.9 mm
effective pile thickness:	ISO 1766	2.3 mm
total mass:	ISO 8543	4,188 g/m²
nominal total pile mass:	ISO 2424	616 g/m²
effective pile mass:	ISO 8543	275 g/m²
pile density:	ISO 8543	0.099 g/cm³

performance		
number of tufts:	ISO 1763	219,000/m² 44.6 per 10cm
electrostatic propensity:	ISO 6356	≤ 2.0 kv (stroll test)
use classification:	EN 1307	33 commercial heavy
luxury class:	EN 1307	LC 1
dimensional stability:	EN 986	≤ 0.2 %
impact sound insulation:	ISO 10140	25 dB
sound absorption classification:	ISO 354/11654	0.15aw Class E
thermal resistance m² K/W:	ISO 8302	0.065 m² K/W TOG 0.65
dry slip resistance:	ISO 13893	pass
colour fastness to light:	ISO 105-B02	> 6
flammability:	EN 13501-1	Bfl - S1
castor chair:	EN 948	≥ 2.4 continuous use

10 year commercial limited warranty subject to installation in full accordance with manufacturer's instructions and a regular effective cleaning and maintenance programme.

recommended installation methods



coordinating products

carpet tile: **nook tile, roam tile**



07

EN 14041:2004/AC 2006

DOP 0338/CPR/0517/0917/BT

Manufactured by: Shaw Industries Group Inc.,
PO Drawer 2128, Dalton, Georgia 30722 USA



Taskworx® carpet tiles for use as an indoor floor
covering as specified by the manufacturer
Notified Body Number 0338

attributes + certifications

environmental product declaration (EPD):

take back policy:*

product packaging:

country of origin:**

3rd party certified in accordance with ISO 14044, ISO 14025, EN 15804
shaw contract offers a take back policy for all taskworx products
100% recyclable
United Kingdom

additional information

*For more information about the take back policy, visit www.shawcontract.com/takebackpolicy.

**Meets or exceeds all local and national regulations in country of manufacture. (Manufactured in an ISO 90001 & ISO 14001 certified facility or equivalent)



Specifications are subject to nominal manufacturing variances. Material supply and/or manufacturing processes may necessitate specification changes without notice. This carpet is an exclusive design and may not be duplicated in any manner.
use of this design in the creation of another carpet design is also strictly prohibited. Visit shawcontract.com/testing for more information.

LRV: Light Reflectance Values

	Style Number	Colour Name	Colour Number	LRV
roam tile	5T228	grey mist	26481	11.2
	5T228	flint	26505	3.1
	5T228	cobblestone	26515	15.3
	5T228	sussex grey	26535	10.4
	5T228	shadow	26557	6.0
	5T228	stonegate	26760	11.0
nook tile	5T229	grey mist	26481	11.4
	5T229	regent blue	26485	7.2
	5T229	flint	26505	3.2
	5T229	cobblestone	26515	15.9
	5T229	looking glass	26530	15.7
	5T229	sussex grey	26535	11.5
	5T229	shadow	26557	6.0
	5T229	stonegate	26760	10.4
graph tile	5T227	grey mist	26481	11.4
	5T227	regent blue	26485	7.3
	5T227	flint	26505	2.9
	5T227	cobblestone	26515	15.8
	5T227	looking glass	26530	13.6
	5T227	sussex grey	26535	11.0
	5T227	shadow	26557	5.9
	5T227	stonegate	26760	10.6